


HIGH POWER 250W HIGH QUALITY AUDIO AMPLIFIER APPLICATIONS

N CHANNEL LATERAL MOSFET

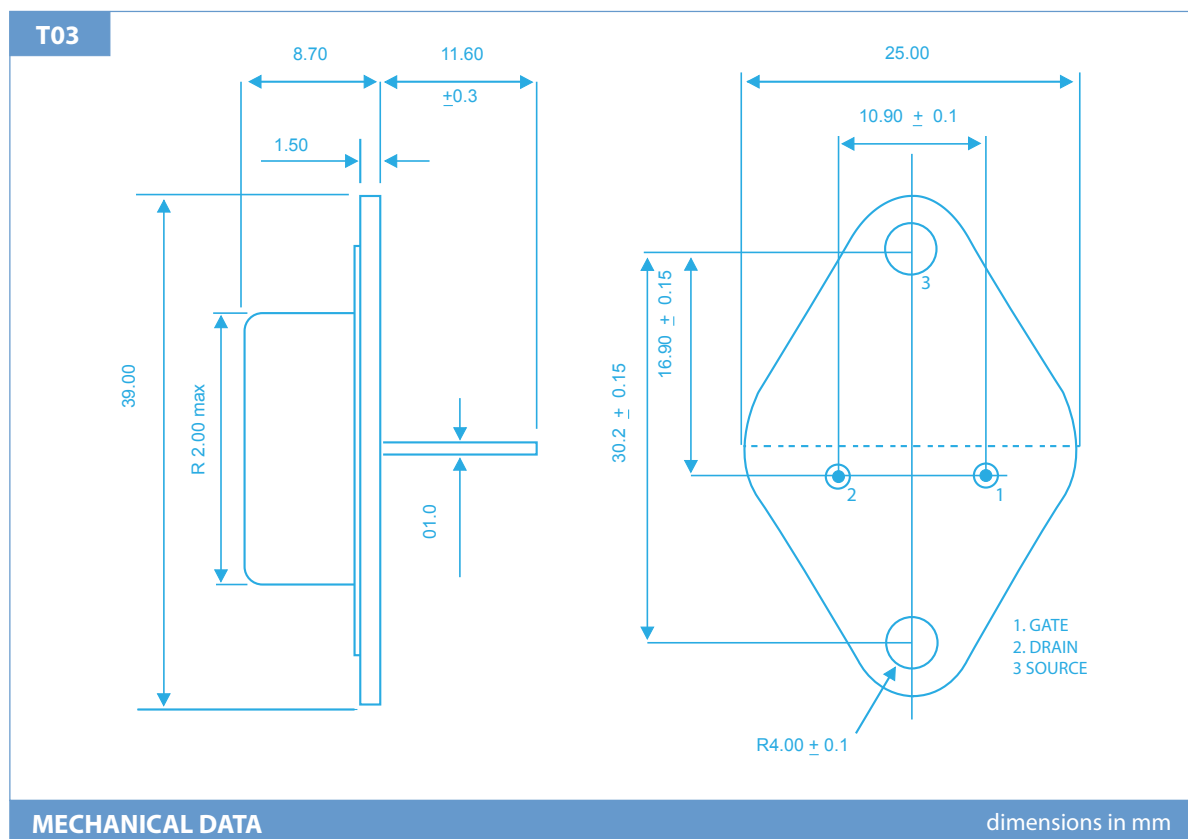

ABSOLUTE MAXIMUM RATINGS

($T_C = 25^\circ\text{C}$ unless otherwise stated)

ECF20N20

V_{DSX}	Drain – Source Voltage	200V
V_{GSS}	Gate – Source Voltage	$\pm 14\text{V}$
I_D	Continuous Drain Current	16A
$I_{D(PK)}$	Body Drain Diode	16A
P_D	Total Power Dissipation @ ($T_{\text{case}} = 25^\circ\text{C}$)	250W
T_{stg}	Storage Temperature Range	-55 to 150°C
T_j	Maximum Operating Junction Temperature	150°C
$R_{\theta JC}$	Thermal Resistance Junction - case	0.5°C/W

STATIC CHARACTERISTICS(T_C = 25°C unless otherwise stated)

Characteristic		Test Conditions		MIN	TYP	MAX	UNIT
BV _{DSX}	Drain – Source Breakdown Voltage	ID = 10mA	ECF20N20	200			V
BV _{GSS}	Gate – Source Breakdown Voltage	VDS = 0	IG=±100uA	±14			V
V _{GS(OFF)}	Gate - Source Cut-Off Voltage	VDS = 10V	ID = 100mA	0.10		1.5	V
V _{DS(SAT)} *	Drain - Source Saturation Voltage	VGD = 0	ID = 16A			12	V
I _{DSX}	Drain - Source Cut - Off Current	VGS = -10V	VDS = 200V			10	mA
Yfs*	Forward Transfer Admittance	VDS = 10V	ID = 3A	1.4		4	S


DYNAMIC CHARACTERISTICS(T_C = 25°C unless otherwise stated)

Characteristic		Test Conditions	N-Channel	P-Channel	UNIT
C _{iss}	Input Capacitance	VDS= 10V f = 1MHz	950	1900	pF
C _{oss}	Output Capacitance		550	900	
C _{rss}	Reverse Transfer Capacitance		20	60	
t _{on}	Turn-on Time	VDS= 20V ID = 7A	160	150	ns
t _{off}	Turn-off Time		80	110	


* Pulse Test: Pulse Width = 300μs, Duty Cycle ≤ 2%

Typical Characteristics for 250W devices


Power vs. Temperature Derating

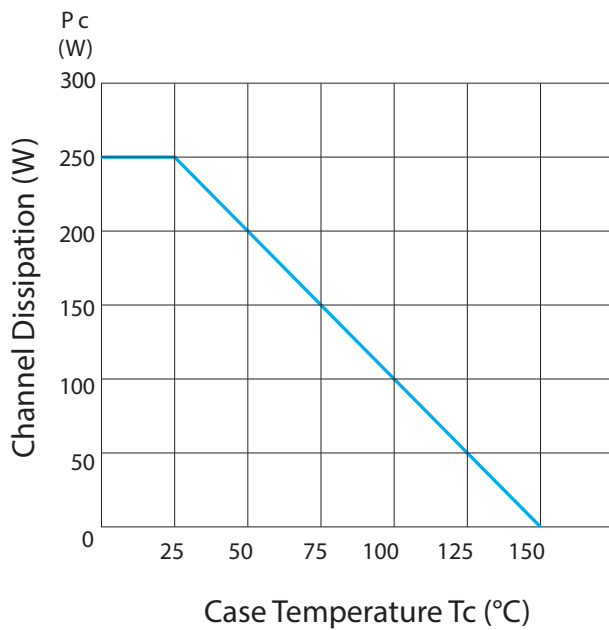


Maximum Safe Operating Area

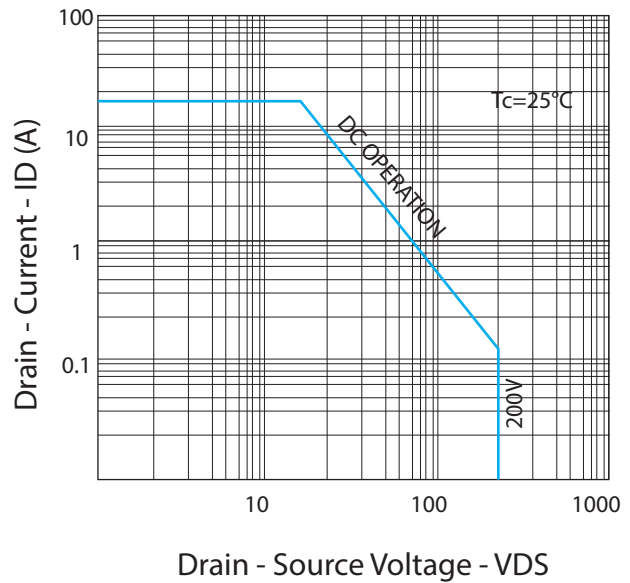

Typical Output (N-Channel)

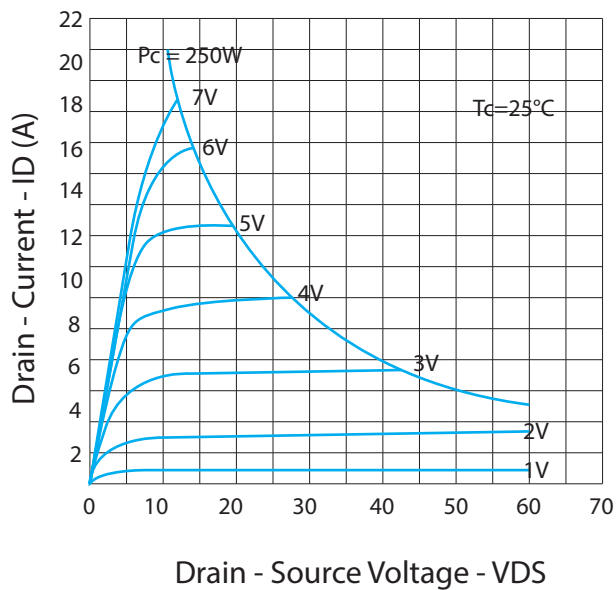

Typical Transfer Characteristics (N-Channel)

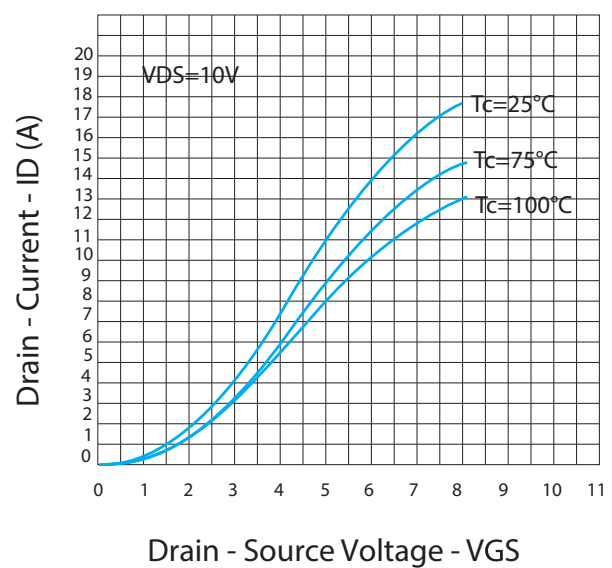

Typical Characteristics for 250W devices (cont.)

Forward Transfer Admittance (N-Channel)

